Artisprime®
Monofocal +

The monofocal advantages with EDOF performances*

Hydrophobic

Preloaded

Available in Toric version

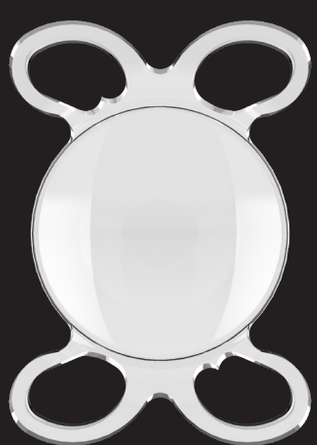

CE 0459

Made in France

CRISTALENS

Technical specifications

Monofocal +

Lens type optic	For implantation in the capsular bag
Diameter overall	6.00 mm (from +10.0D to +35.0D)
Diameter design	10.79 mm (from +10.0D to +35.0D)
Design	One-piece square edge on 360°
Optic design	Monofocal + Aspherical (compensation of corneal aberrations) Toricity and marks on the posterior face Biconvex
Angulation	5°
Material	Hydrophobic CBK 1.8 from Cristalens
Dioptric powers (SE)	From 10.0D to +35.0D by 0.5D
Cylinder powers	From 0.00D to +6.00D by 0.75D
Estimated A-Constant (SRK-T)	119.3 Ultrasound biometry 119.7 Interference laser biometry
Suggested Anterior Chamber Depth (ACD)	5.77 mm Ultrasound biometry 6.03 mm Interference laser biometry
Refractive index	1.54
Sterilization	Ethylene oxide
Injection system	Preloaded system
Recommended incision size	2.1 mm

Toric calculator available on our website

Toric calculator

Ref: BROCHURE_3006_EN-V1.0-Edition 16/01/2026

* Courtesy of Cristalens Industrie Lannion, France. Data on file.

CRISTALENS

CRISTALENS INDUSTRIE

4 rue Louis de Broglie - 22300 Lannion - France

+33 (0)2 96 48 92 92

SAS with a capital of 4 270 568,40 € - RCS Saint-Brieuc 480015619 - SIRET: 480 015 619 00012

www.cristalens-international.com